
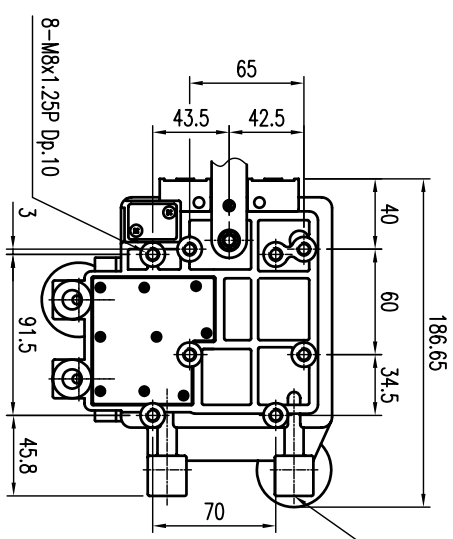
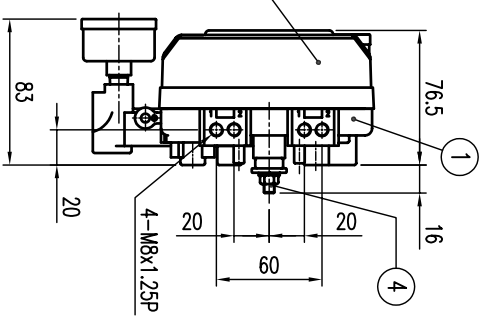


REV. NO.	REVISION DESCRIPTION	BRNWN / DATE	REVIEWED / DATE	APPROVED / DATE
△	DRAWING ARRANGEMENT	HSS/060612	KCH/060612	LVH/060612
△	DRAWING ARRANGEMENT	HSS/080305	JCS/080305	LVH/080305

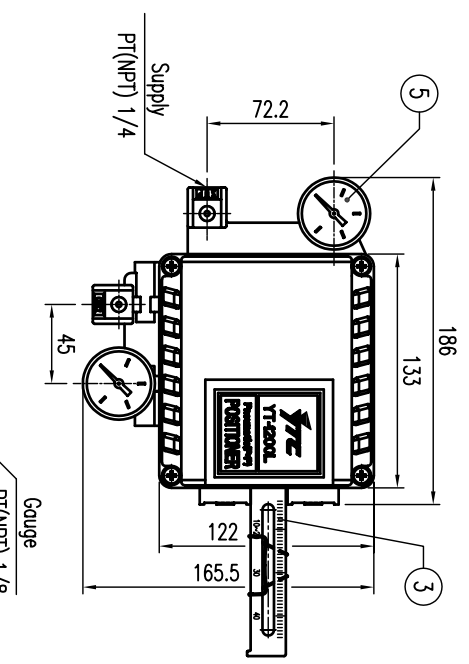

SPECIFICATIONS

Applicable Fluid	Air	Ambient Temp.	-20°C ~ 70°C (-4°F ~ 158°F)
Acting Type	☐ Single ☐ Double	Linearity	±1% F.S. ±2% F.S.
Input Signal	0.2 ~ 1kgf/cm ² (3 ~ 15psi)	Hysteresis	±1.0% F.S.
Supply Pressure	1.4 ~ 7kgf/cm ² (20 ~ 100psi)	Sensitivity	±0.2% F.S. ±0.5% F.S.
Stroke	10~150mm	Repeatability	±0.5% F.S.
Protection	IP66	Air Consumption	3 LPM (Sup.=1.4kgf/cm ² , 20psi)
Air Connection	PT(NPT) 1/4	Max. Flow Capacity	80 LPM (Sup.=1.4kgf/cm ² , 20psi)
Gauge Connection	PT(NPT) 1/8	Material	Aluminum Diecasting
Pressure Gauge (Output Pressure)	☐ 0~2kgf/cm ² ☐ 0~4kgf/cm ² ☐ 0~10kgf/cm ²	Weight	1.7kg (3.1lb)
		Lever Type	☐ 10~40mm ☐ 30~70mm ☐ 60~100mm ☐ 100~150mm

NO.	PART NAME	MATERIAL	QTY	REMARK
5	PRESSURE GAUGE	STS304	2	
4	MAIN SHAFT	STS303	1	
3	FEEDBACK LEVER	STS304	1	
2	BASE COVER	ALDC12	1	
1	BASE BODY	ALDC12	1	

SURFACE TREATMENT		PRODUCT NAME		TITLE	
FINISH TREATMENT		P/P POSTONER		PNEUMATIC-PNEUMATIC LINEAR POSTONER ASSY (ING/STANDARD)	
VARIATION		MODEL		DRAWING NO.	
OTHERWISE NOTE		PROJECTION		YT-1200L (STANDARD)	
GENERAL TOLERANCE		SCALE		REV.	
		QUANTITY		4	
		SHEET NO.			
		1 / 1			

