


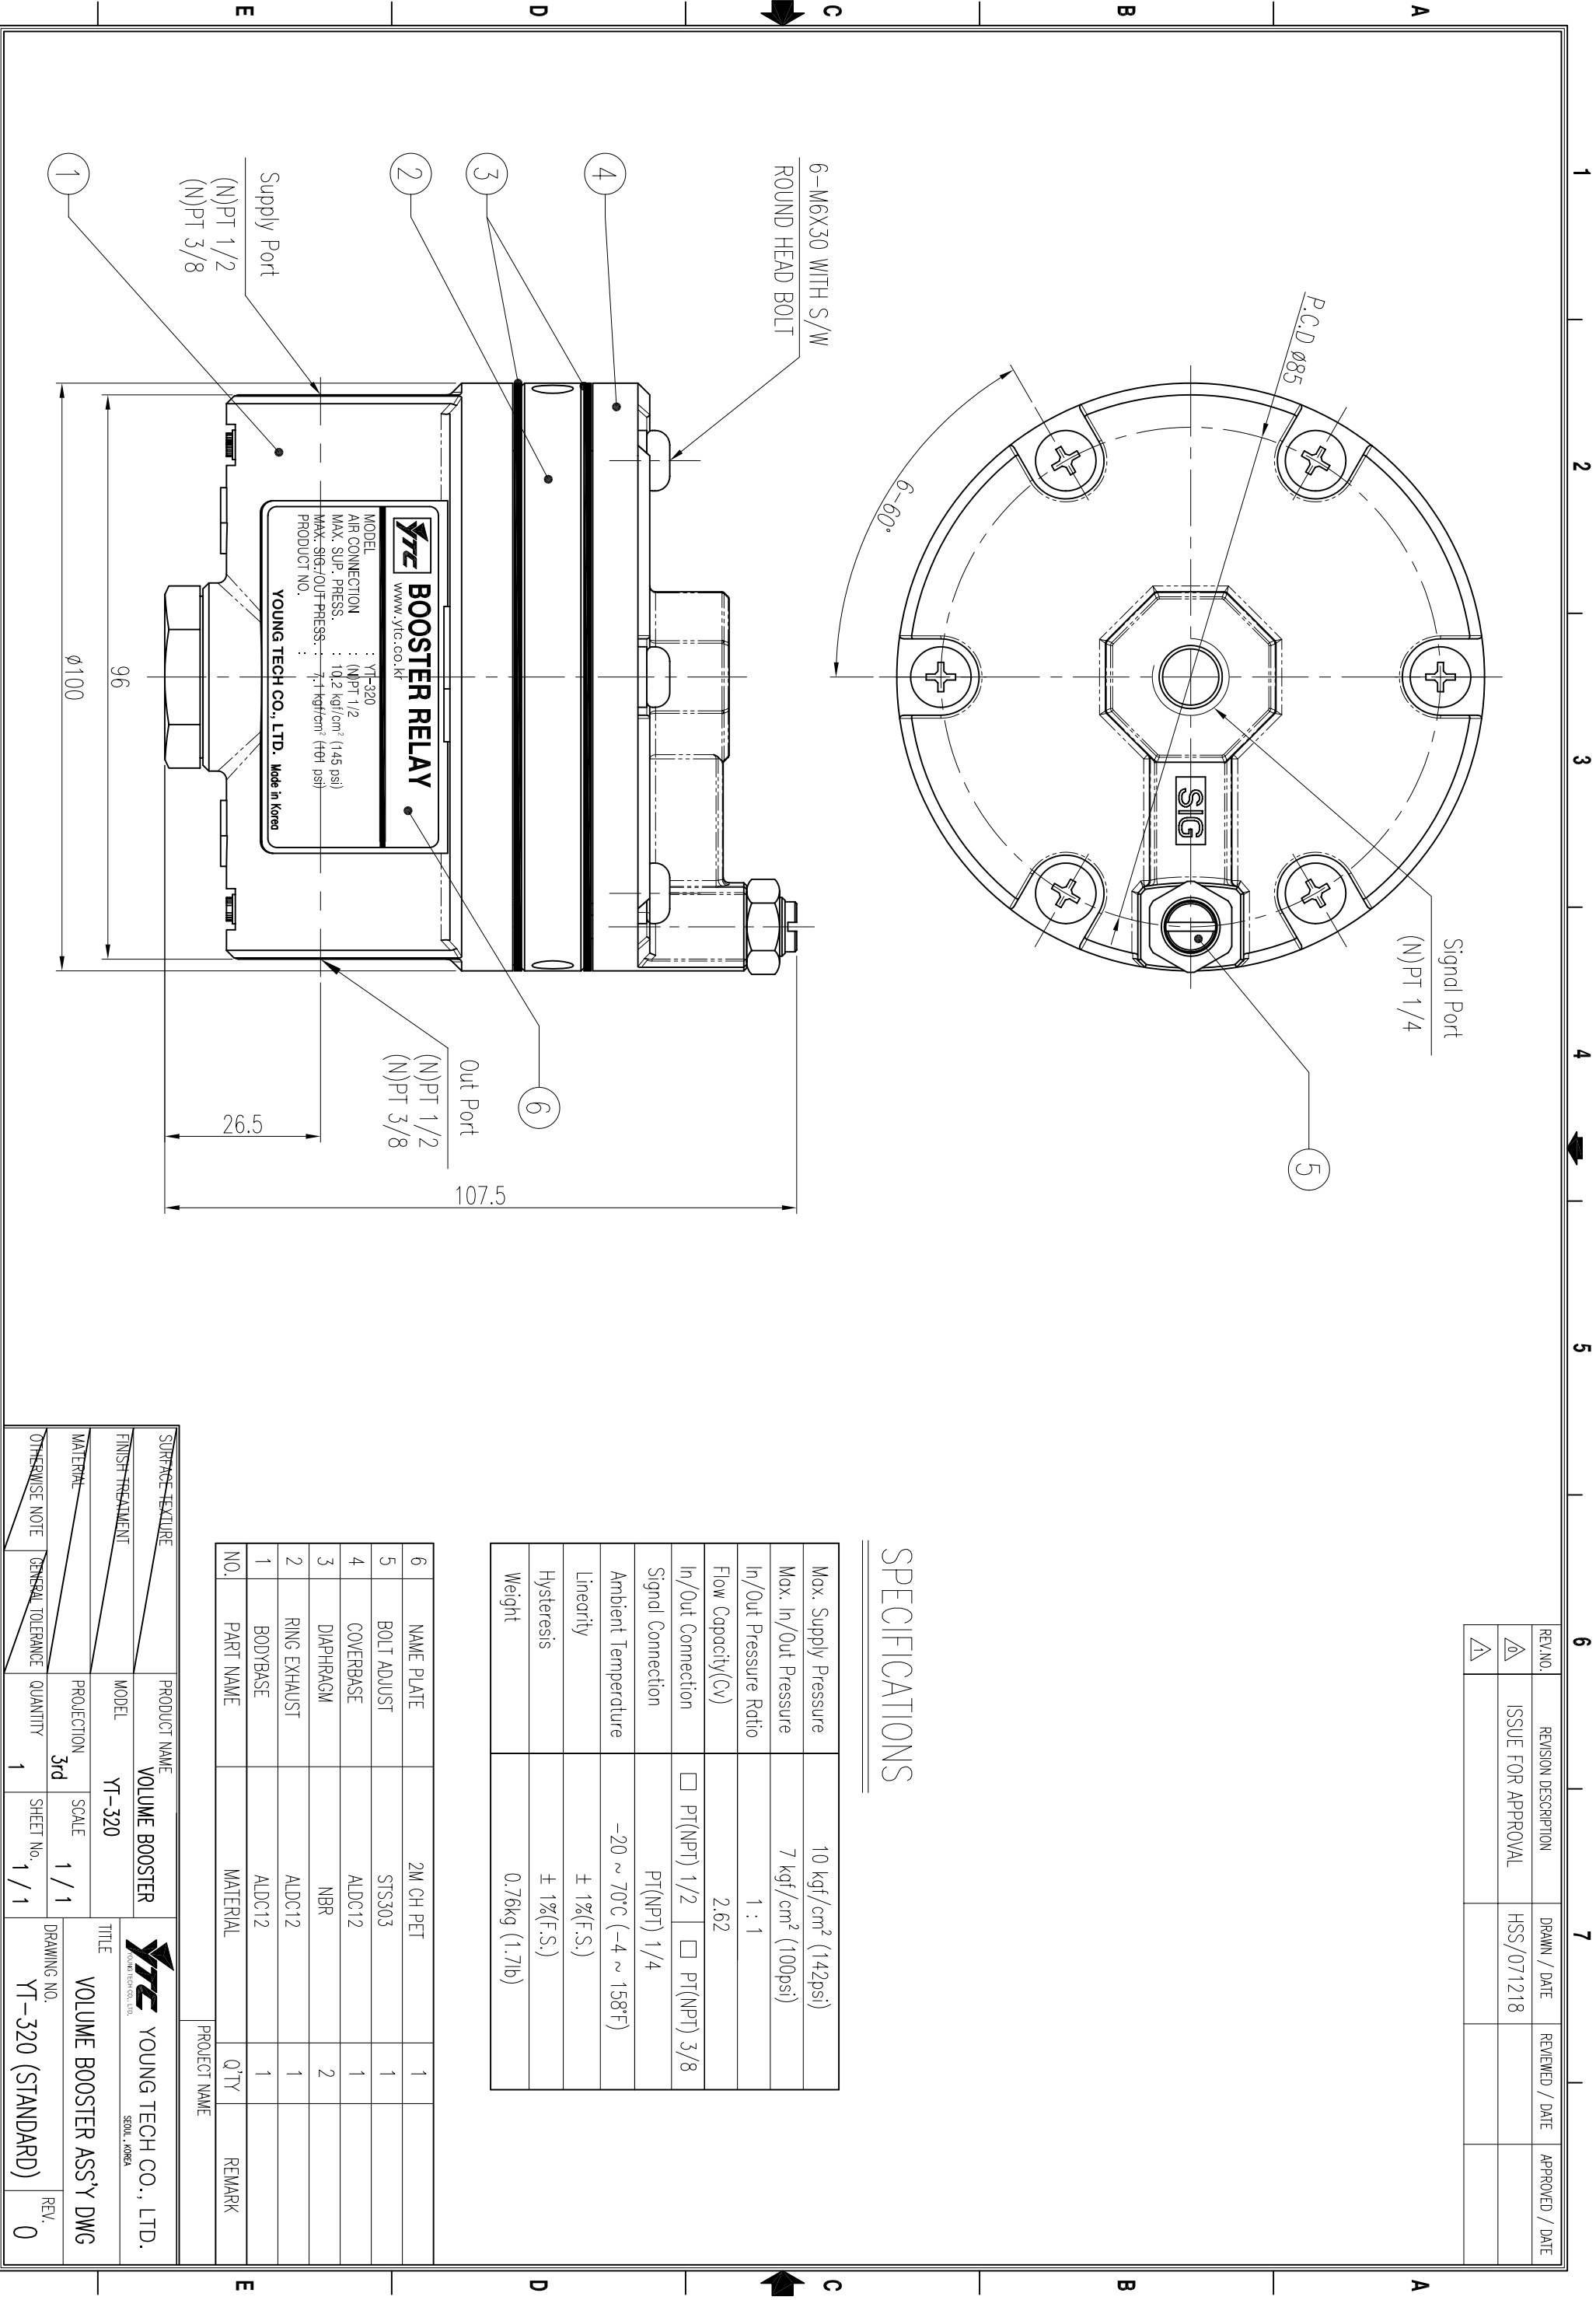

REV. NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
△	ISSUE FOR APPROVAL	HSS/071218		
△				

SPECIFICATIONS

Max. Supply Pressure	10 kgf/cm ² (142psi)
Max. In/Out Pressure	7 kgf/cm ² (100psi)
In/Out Pressure Ratio	1 : 1
Flow Capacity(Cv)	2.62
In/Out Connection	☐ PT(NPT) 1/2 ☐ PT(NPT) 3/8
Signal Connection	PT(NPT) 1/4
Ambient Temperature	-20 ~ 70°C (-4 ~ 158°F)
Linearity	± 1%(F.S.)
Hysteresis	± 1%(F.S.)
Weight	0.76kg (1.7lb)

6	NAME PLATE	2M GH PET	1	
5	BOLT ADJUST	STS303	1	
4	COVERBASE	ALDC12	1	
3	DIAPHRAGM	NBR	2	
2	RING EXHAUST	ALDC12	1	
1	BODYBASE	ALDC12	1	
NO.	PART NAME	MATERIAL	Q'TY	REMARK

SURFACE TEXTURE		PRODUCT NAME		TITLE	
FINISH TREATMENT		VOLUME BOOSTER		YOUNG TECH CO., LTD. SEOUL, KOREA	
MATERIAL		MODEL		YT-320	
OTHERWISE NOTE		PROJECTION		SCALE	
GENERAL TOLERANCE		QUANTITY		SHEET No.	
		1		1 / 1	
				DRAWING NO.	
				YT-320 (STANDARD)	
				REV.	
				0	