
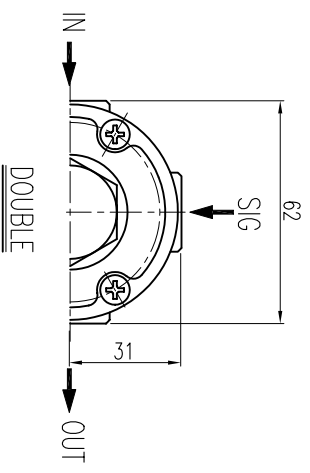
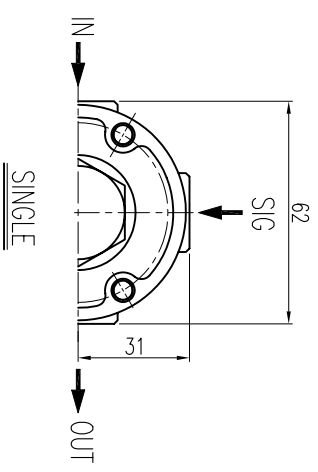
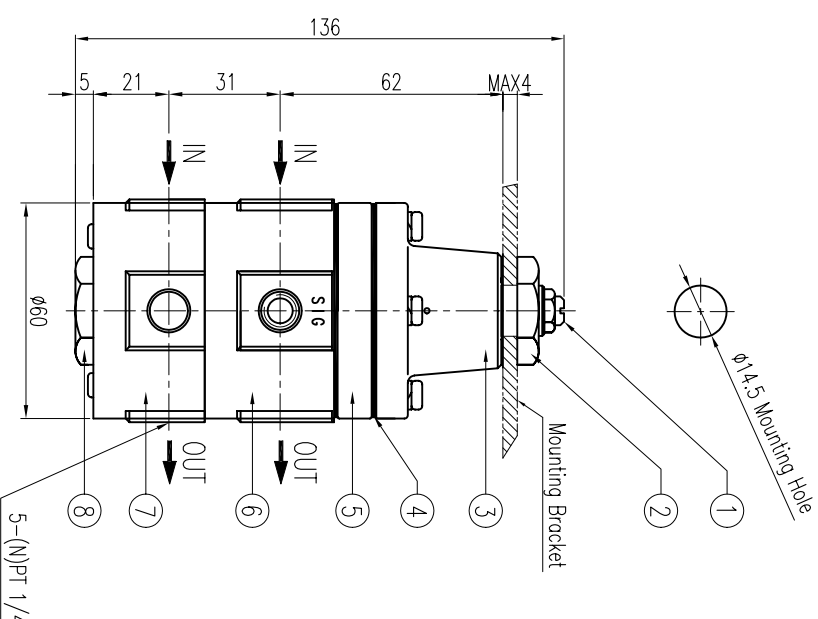


REV. NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
△	ISSUE FOR APPROVAL	HSS/050601		
△				

SPECIFICATIONS

Item . Type	YT-400	
	☐ Single	☐ Double
Signal Pressure	Max. 10kgf/cm ² (142psi)	
Pressure Range	1.4 ~ 7kgf/cm ² (20 ~ 100psi)	
Lock-Up Pressure	Max. 7kgf/cm ² (100psi)	
Differential Pressure	Below 0.1kgf/cm ² (1.4psi)	
Air Connection	☐ PT 1/4	
Material	☐ NPT 1/4 Aluminum Diecasting	
Weight	0.15kg (0.33lb)	0.7kg (1.5lb)

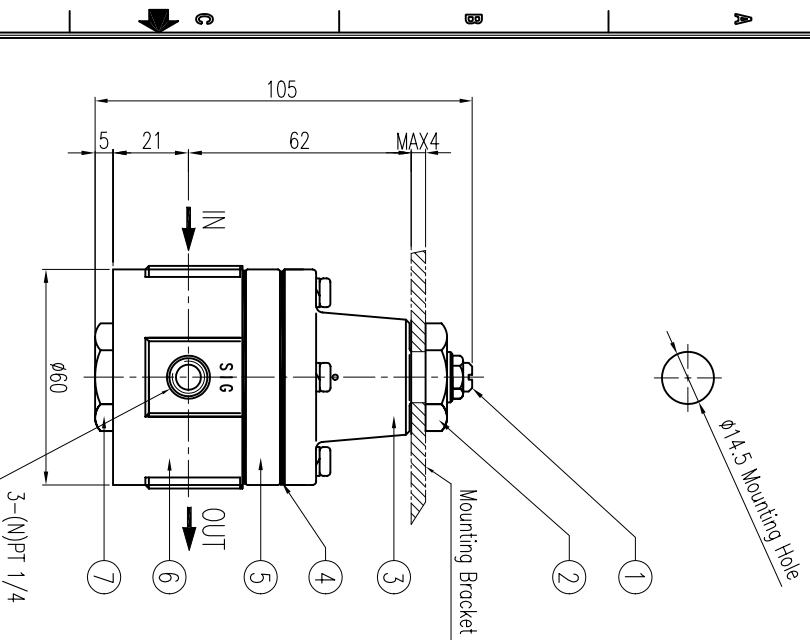

SINGLE			
NO.	PART NAME	MATERIAL	Q'TY
7	PLUG	C3604BD + Ni PLATED	1
6	BODY	ALDC12	1
5	EXHAUST RING	ALDC12	1
4	DIAPHRAGM	N.B.R	2
3	COVER	ALDC12	1
2	MOUNTING NUT	C3604BD + Ni PLATED	1
1	ADJUST BOLT	STS 303	1

DOUBLE			
NO.	PART NAME	MATERIAL	Q'TY
8	PLUG	C3604BD + Ni PLATED	1
7	LOWER-BODY	ALDC12	1
6	UPPER-BODY	ALDC12	1
5	EXHAUST RING	ALDC12	1
4	DIAPHRAGM	N.B.R	2
3	COVER	ALDC12	1
2	MOUNTING NUT	C3604BD + Ni PLATED	1
1	ADJUST SHAFT	STS 303	1

SURFACE TEXTURE		PRODUCT NAME		TITLE	
FINISH TREATMENT		MODEL		LOCK UP VALVE ASS'Y DWG	
MATERIAL		YT-400		DRAWING NO.	
OTHERWISE NOTE (GENERAL TOLERANCE)		PROJECTION		REV.	
		3rd		0	
		SCALE		YT-400	
		QUANTITY			
		1			
		SHEET No.			
		1 / 1			