

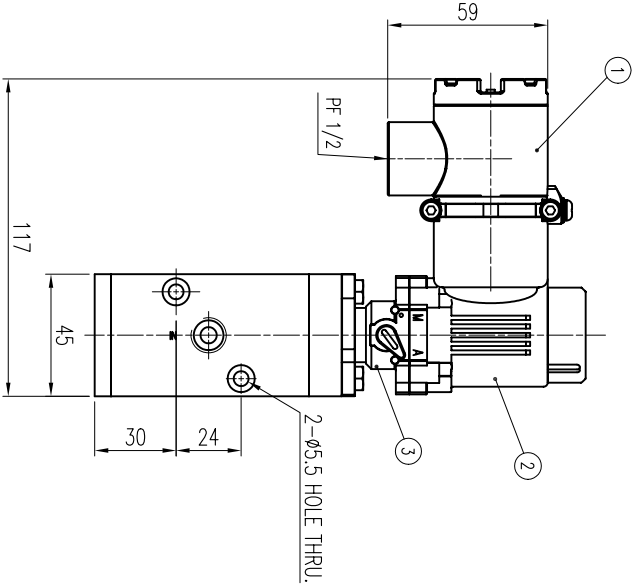
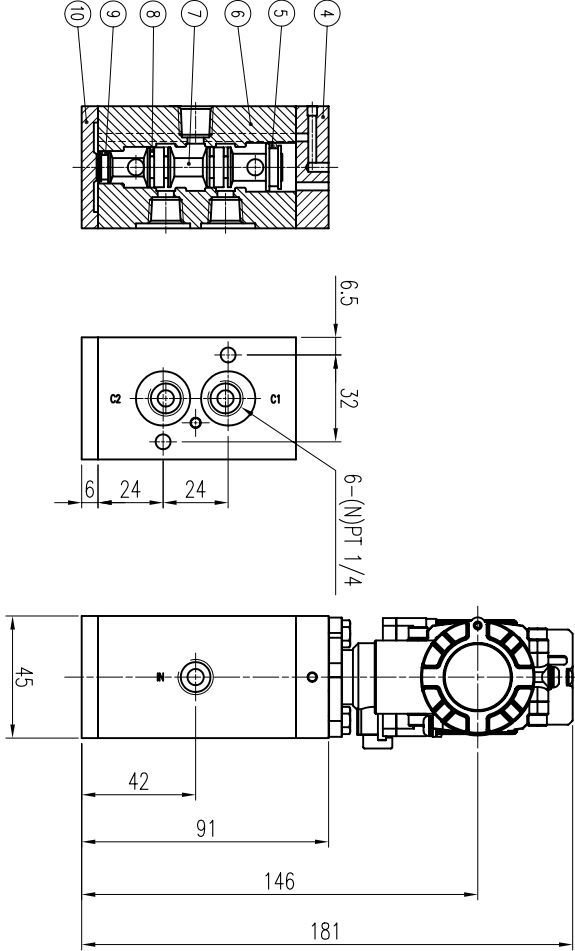


Specifications

Item Type	YT-7000		
Valve Type	4 way		
Rating Current	☐ AC 220V	63 mA	
	☐ AC 110V	70 mA	
	☐ DC 24V	160 mA	
Explosion Proof type	ExdIICt6		
Connection Type	☐ PT 1/4	☐ NPT 1/4	
Supply Pressure Max.	1 ~ 10kgf/cm ²		
Conduit	PF 1/2 (G 1/2)		
Ambient Temp	-20°C ~ 70°C		
Cv Factor	0.75		
Weight	0.9 kg (2.0 lb)		



5	P16 O-RING	1	NBR	10	LOW CAP	1	ALDC12
4	UP CAP	1	ALDC12	9	P10 O-RING	1	NBR
3	LOW BODY	1	ALDC12	8	I-RING	4	NBR
2	UP BODY	1	ALDC12	7	SPool	1	AL2011
1	ROTOR	1	ALDC12	6	4WAY BLOCK	1	A6061
NO	TITLE	QTY	MATERIAL	NO	TITLE	QTY	MATERIAL

REV. NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
△	ISSUE FOR APPROVAL	HSS/050624		
△				

PROJECT NAME

-

YTC YOUNG TECH CO., LTD.

SEAL, KOREA

AIR SOLENOID VALVE
ASS'Y DWG (4Way)

YT-7000 (4Way)

REV. 0

YTC-A3