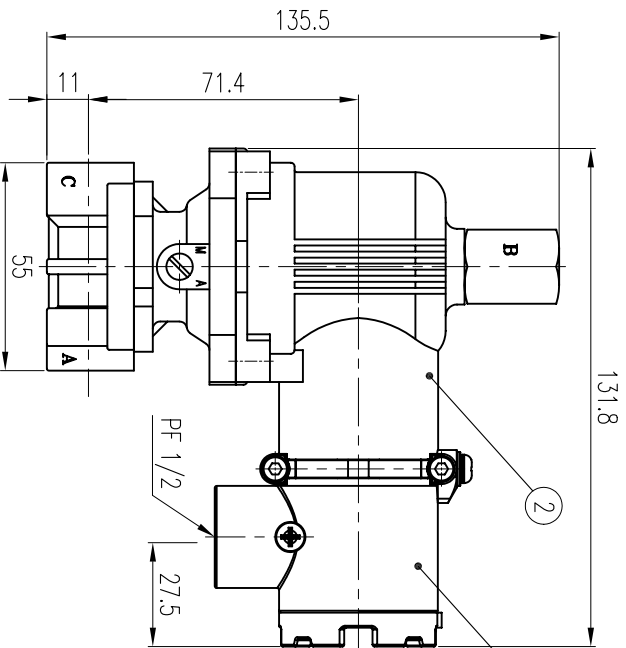


Item Type	YT-700S			
Valve Type	3 way			
Rating Current	☐ AC 220V	100 mA		
	☐ AC 110V	160 mA		
	☐ DC 24V	290 mA		
Explosion Proof type	ExdIICT6			
Connection Type	☐ PT 1/4	☐ NPT 1/4		
Cv Factor	☐ 0.084(ϕ 1.6)		☐ 0.2(ϕ 3)	
Supply Pressure Max.	7kgf/cm ²		4kgf/cm ²	
Ambient Temp	-20°C ~ 70°C			
Conduit	PF 1/2			
Weight	0.8 kg (1.8 lb)			

5	3WAY BLOCK	A6063	1	
4	LOW BODY	ALDC12	1	
3	ROTATOR	ALDC12	1	
2	UP BODY	ALDC12	1	
1	BODY CAP	C3604BD	1	
NO.	PART NAME	MATERIAL	QTY	REMARK

SURFACE TEXTURE		PRODUCT NAME AIR SOLENOID VALVE		 YOUNG TECH CO., LTD. 720001, SEOUL, KOREA	
FINISH TREATMENT		MODEL YT-700S		TITLE AIR SOLENOID VALVE ASS'y DWG	
MATERIAL		PROJECTION 3rd	SCALE 1 / 2	DRAWING NO. YT-700S(3Way)	
OTHERWISE NOTE		QUANTITY 1	SHEET NO. 1 / 1	REV. 0	
		GENERAL TOLERANCE			