


REV. NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
△	ISSUE FOR APPROVAL	HSS/061221		
△				

SPECIFICATIONS

Item . Type	YT-405	
	☐ Single	☐ Double
Signal Pressure	Max. 10 kgf/cm²(142 psi)	
Pressure Range	1.4 ~ 7 kgf/cm²(20 ~ 100 psi)	
Lock-Up Pressure	Max. 7 kgf/cm²(100 psi)	
Differential Pressure	Below 0.1 kgf/cm²(1.4 psi)	
Air Connection	☐ PT 1/4	
	☐ NPT 1/4	
Material	Stainless Steel	
Weight	1.3 kg (2.3 lb)	1.5 kg (3.2 lb)

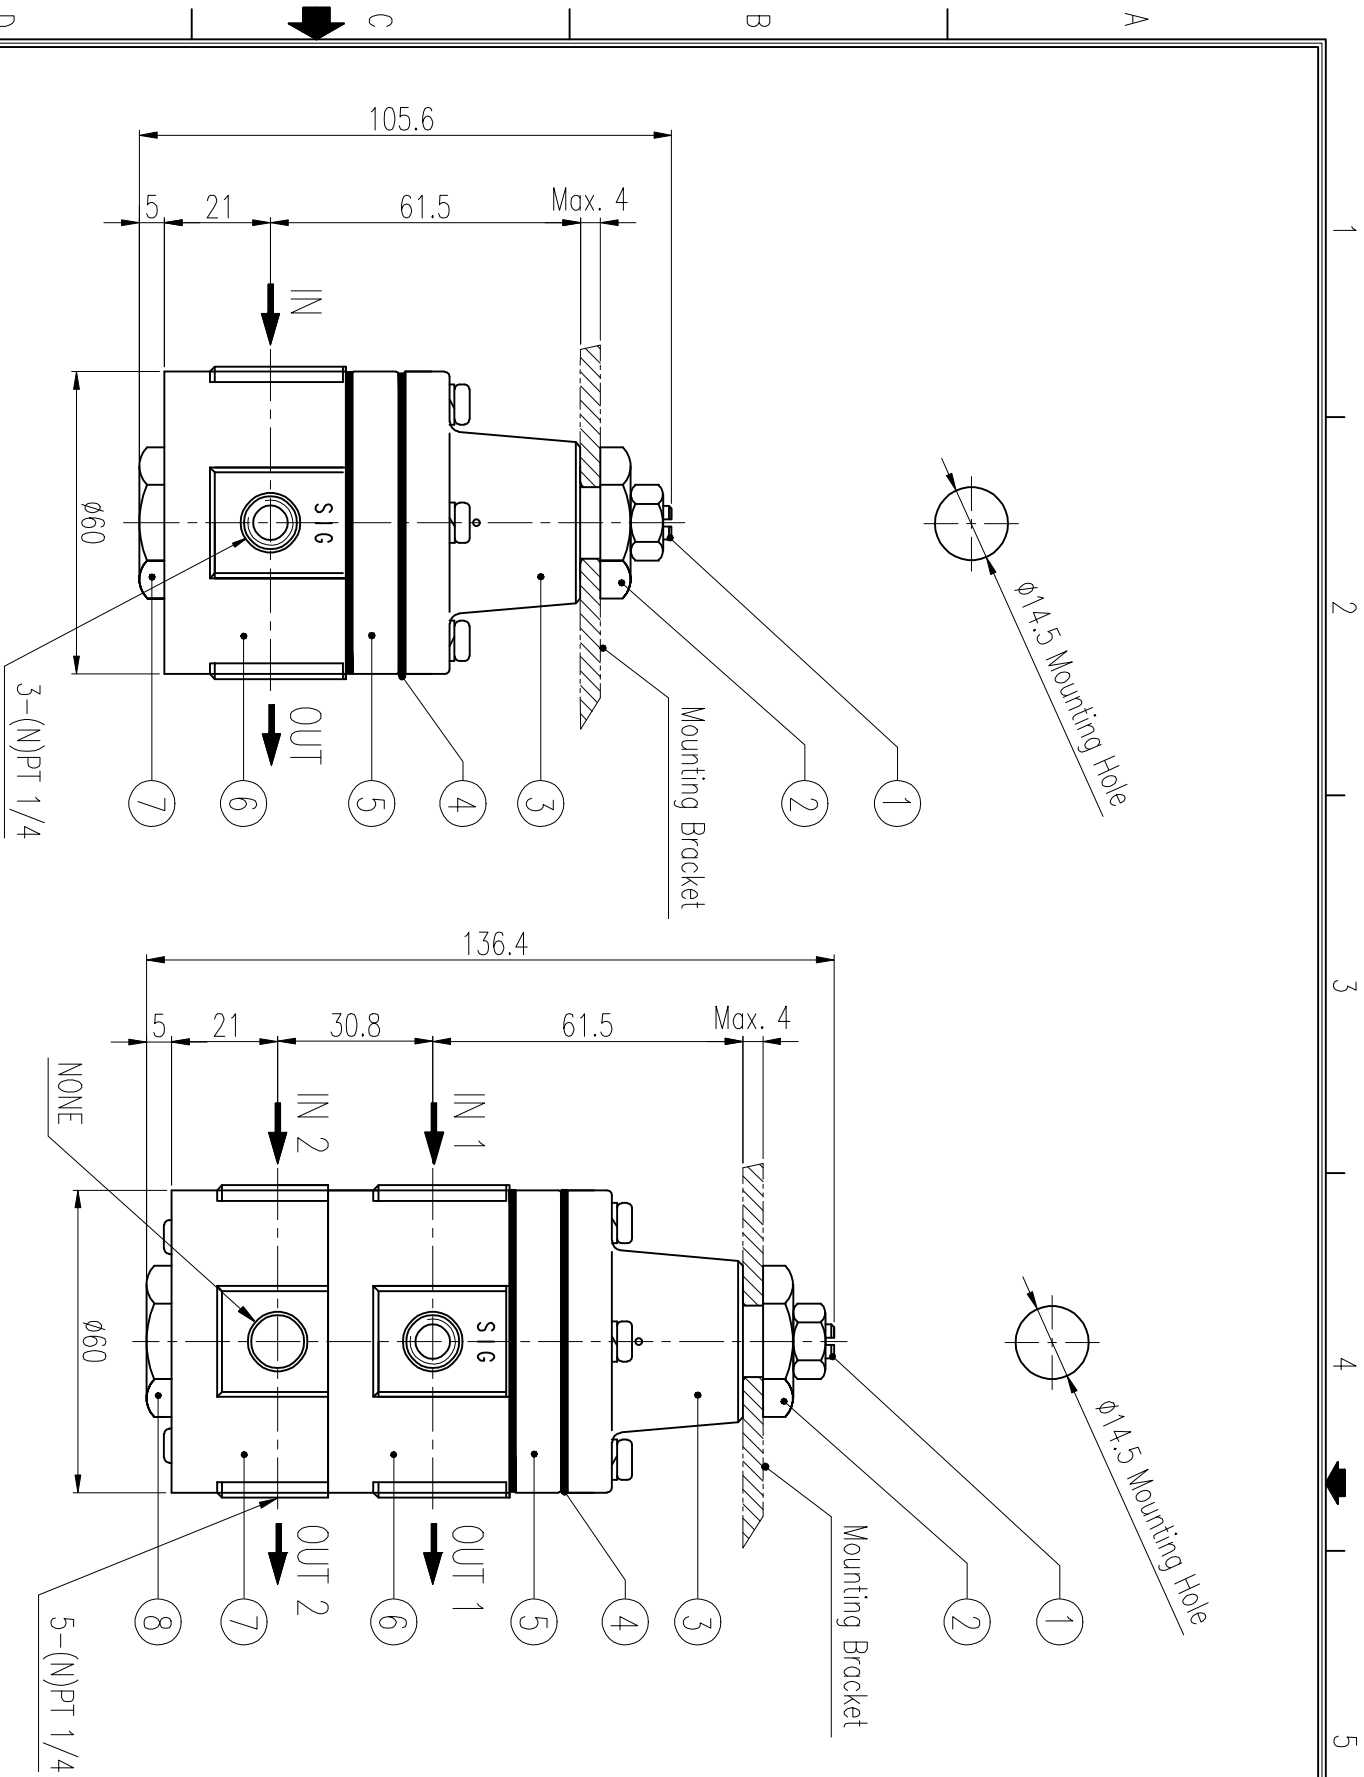

SINGLE

7	PLUG	STS316	1	
6	BODY	STS316	1	
5	EXHAUST RING	STS316	1	
4	DIAPHRAGM	N.B.R	2	
3	COVER	STS316	1	
2	MOUNTING NUT	STS316	1	
1	ADJUST BOLT	STS316	1	
No.	PART NAME	MATERIAL	Q'ty	REMARK

DOUBLE

8	PLUG	STS316	1	
7	LOWER-BODY	STS316	1	
6	UPPER-BODY	STS316	1	
5	EXHAUST RING	STS316	1	
4	DIAPHRAGM	N.B.R	2	
3	COVER	STS316	1	
2	MOUNTING NUT	STS316	1	
1	ADJUST SHAFT	STS316	1	
No.	PART NAME	MATERIAL	Q'ty	REMARK

SURFACE-TEXTURE		PRODUCT NAME		PROJECT NAME	
FINISH-TREATMENT		LOCK UP VALVE		-	
MATERIAL		MODEL		YT-405	
OTHERWISE NOTE		PROJECTION		SCALE	
GENERAL TOLERANCE		QUANTITY		1 / 1.5	
		SHEET No.		1 / 1	
		DRAWING NO.		YT-405 (STANDARD)	
		REV.		0	